

SENTRY SAF-T-VISE ATOMIZERS

Chemical Injection Atomizers

CORROSION MONITORING

Sentry® Saf-T-Vise® atomizers offer ease of use and custom configuration for maximum versatility. The Saf-T-Vise patented locking collet is simple to use and enhances operator safety by safely securing the shaft within the process stream in both low and extremely high pressure conditions. A variety of atomizer configurations are available to provide the best delivery of the required chemicals to prevent or mitigate corrosion within a pressurized process such as a pipeline.

MODELS

STV-LP1-A | STV-LP2-A | STV-HP1-A | STV-HP2-A | STV-HP3-A


BENEFITS

Saf-T-Vise atomizers are hand insertable (low pressure) or mechanically insertable (high pressure) into your pressurized system. With a wide range of pressure ratings available, Saf-T-Vise atomizers are the optimal choice for protecting most pressurized applications. They can be mounted in any orientation with extended insertion lengths of up to 20 feet for hard-to-access application situations. Saf-T-Vise STV-T Series insertion tools are used for mechanically inserting the atomizer shafts.

FEATURES

- Process pressure bleeder valve
- Patented locking collet safely secures the shaft within the process stream until released by the operator
- Integrated safety cap or chain, depending on model
- Multiple nozzle choices: 1/8 inch male or female NPT connections standard; other connection sizes and types available
- Designed and manufactured in accordance with ASME B31.3
- Canadian Registration Number available for most models
- Process wetted components comply with NACE MR0175/2009 and are suitable for service in hydrogen sulfide (H₂S) environments

STANDARD AVAILABLE TIPS

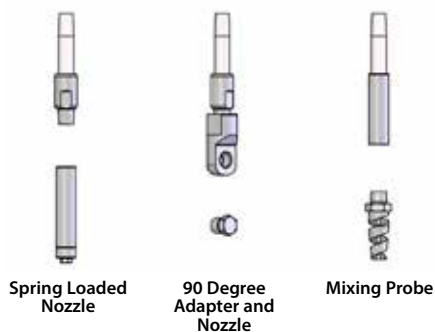

Spring Loaded Nozzle

90 Degree Adapter and Nozzle


Mixing Probe

Model and process connections can limit atomizer tip choices—contact us if other configurations are required

Manufactured under one or more U. S. patents: 6,357,470 B1; 8,359,937 B2



Sample. Monitor. Measure.
SENTRY
 Any Application. Anywhere.

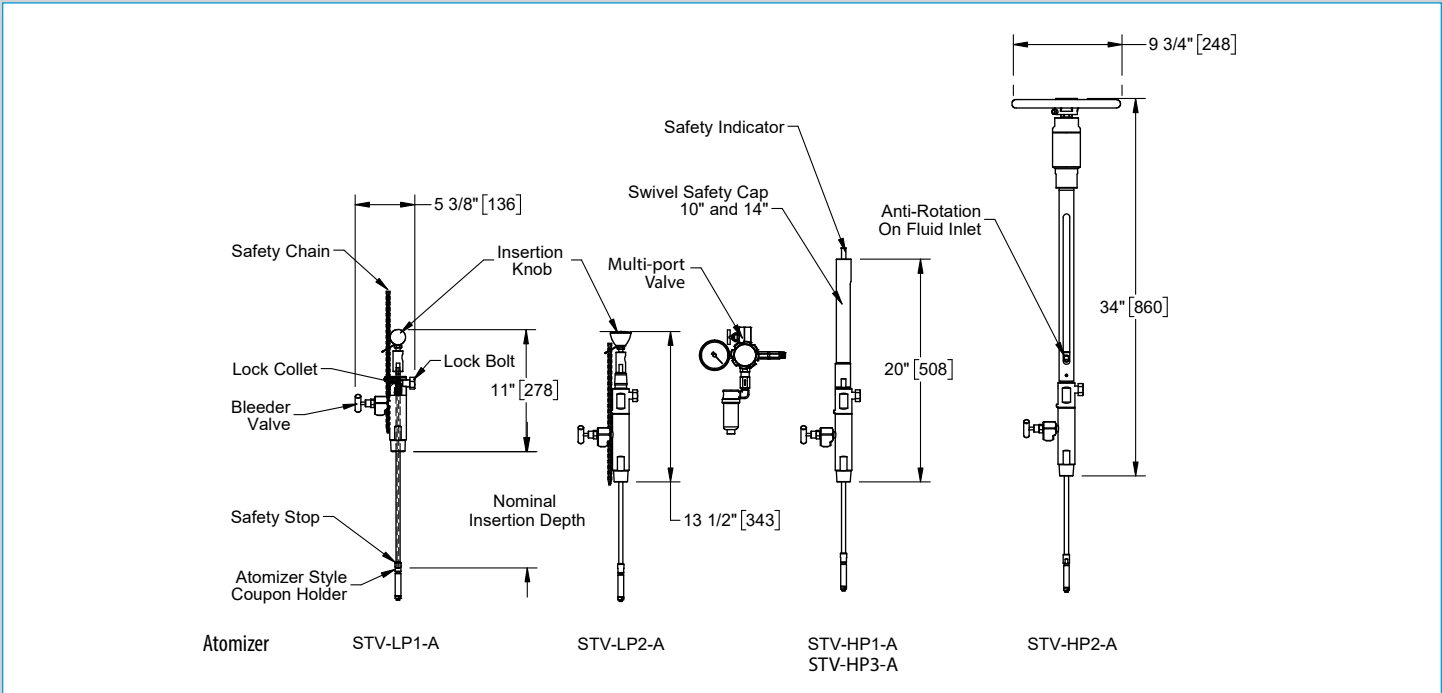

SPECIFICATIONS

model	weight	materials	insertion pressure (MOP)	pressure rating (MAP)	seal material	process connection	insertion depth	rod/shaft OD
STV-LP1-A	4 - 7 lbs (1.8 - 3.2 kg)	316/316L SS	750 psi at 100°F (52 bar at 38°C)	2000 psi at 100°F (138 bar at 38°C)	PTFE min: 0°F/-18°C ⁵ max: 450°F/232°C	1 in MNPT	up to 29 in (0.7 m)	3/8 in
STV-LP2-A	10 - 35 lbs (4.5 - 16 kg)	316/316L SS (standard) Other Alloys available	1/4 in: 1000 psi at 100°F (69 bar at 38°C) 3/8 in: 750 psi at 100°F (52 bar at 38°C) 1/2 in: 420 psi at 100°F (29 bar at 38°C)	4000 psi at 100°F (275 bar at 38°C)	PTFE min: 0°F/-18°C ⁵ max: 450°F/232°C Grafoil min: 0°F/-18°C ⁵ max: consult factory*	1/2 in MNPT 3/4 in MNPT 1 in MNPT 1 1/2 in MNPT 2 in MNPT or Flange	up to 6 ft (1.8 m)	1/4 in 3/8 in or 1/2 in
STV-HP1-A	10 - 45 lbs (4.5 - 20 kg)	316/316L SS (standard) Other Alloys available	5000 psi at 100°F (334 bar at 38°C)		PTFE min: 0°F/-18°C ⁵ max: 450°F/232°C Grafoil min: 0°F/-18°C ⁵ max: consult factory*	1/2 in MNPT 3/4 in MNPT 1 in MNPT 1 1/2 in MNPT 2 in MNPT or Flange	up to 20 ft (6.1 m)	1/4 in 3/8 in or 1/2 in
STV-HP2-A	15 - 45 lbs (7 - 20 kg)	316/316L SS			PTFE min: 0°F/-18°C ⁵ max: 450°F/232°C Grafoil min: 0°F/-18°C ⁵ max: consult factory*	3/4 in MNPT 1 in MNPT 1 1/2 in MNPT 2 in MNPT or Flange	3.5, 7.5, 13.5, 19.5, or 25.5 in (9, 19, 34, 50, or 65 cm)	1/4 in or 3/8 in
STV-HP3-A	10 - 45 lbs (4.5 - 20 kg)	316/316L SS (standard) Other Alloys available	7500 psi at 100°F (517 bar at 38°C)		PTFE min: 0°F/-18°C ⁵ max: 450°F/232°C Grafoil min: 0°F/-18°C ⁵ max: consult factory*	1/2 in MNPT 3/4 in MNPT 1 in MNPT or Flange	up to 20 ft (6.1 m)	1/4 in or 3/8 in

*Grafoil seals are available for higher temperature applications; contact factory for details.
¹316/316L (dual grade) stainless steel is dual certified to meet the mechanical properties of A479-316 at the low carbon content level of A479-316L
 MAP: Maximum Allowable Pressure/MOP: Maximum Operating Pressure
⁵Lower temperature ratings are possible; contact factory for details

sentry-equip.com

966 Blue Ribbon Circle North, Oconomowoc, WI 53066 U.S.A. | +1-262-567-7256 | sales@sentry-equip.com



© 2022 Sentry Equipment Corp. All rights reserved. All product and company names are property of their respective owners. It is solely the responsibility of end users, through their own testing and analysis, to select products and materials suitable for their specific application requirements, ensure they are properly installed, safely applied and properly maintained, and to limit their use to their intended purpose. Improper selection, installation or use may result in personal injury or property damage.

COMPANY WITH
 QUALITY SYSTEM
 CERTIFIED BY DNV GL
 = ISO 9001 =